

# DAFA Hi-tack® liquid sealant



## Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System

### Application


DAFA Hi-tack sealing paste is used for sealing around complicated parts or building parts, where taping or jointing is not possible. Can be basted or sprayed on the material.

DAFA Hi-tack sealing paste is a single component, low-viscous joint filler based on hybrid polymeric technologies.

The paste is odor free, chemically neutral and hardens as a reaction to moisture in the air into a firm, elastic, weather- and airtight incrustation with good UV-resistance.

### Product benefits

- Can be basted and sprayed
- Fast hardening
- Permanent elasticity
- Very easy to handle
- Can be applied on slightly moist surfaces
- Easy seal of complex joints
- Free of solvent
- Isocyanate and silicone free

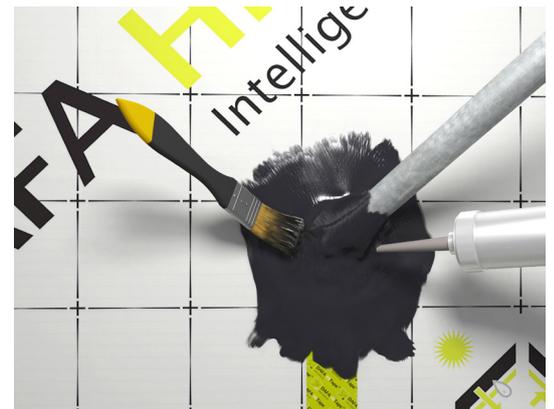

DAFA Hi-tack liquid sealant for sealing of complicated parts



Easy seal of complex joints. Can be basted and sprayed.

### Overview

Color	Grey
Contents per box	20 bags of 580 ml
DAFA item no.	620027540
DB no.	1863432
EAN no.	5705636429090

### Properties

Properties	Method	Value
Material		1-component hybrid polymer
Density	ISO 1183-1	1.18 g/cm <sup>3</sup>
Hardening time		3,5 mm / 24 hours (+ 23 °C / 50% RH)
Installation temperature		+5 °C to +40 °C
MAL code		1-5

