

DAFA universal primer

DAFA universal primer for difficult and very absorbent surfaces



Warranty.



DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.

Description

Universal primer is applied where DAFA's adhesive or vapor barrier tape can't attain sufficient adhesive to the surface. It is recommended to apply primer on absorbent surfaces such as brick, concrete, aerated concrete and natural stone.

Application

Contact surfaces must be clean, dry and free from dust and oils. The primer must be shaken firmly before usage. Apply the primer smoothly and thoroughly. In case of highly porous and absorbent surfaces, it is highly recommended to baste the primer on the surface first.

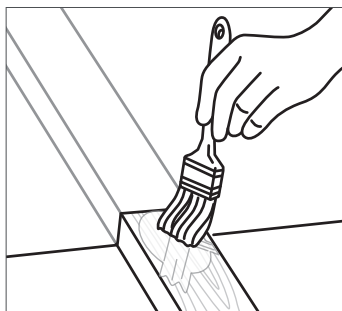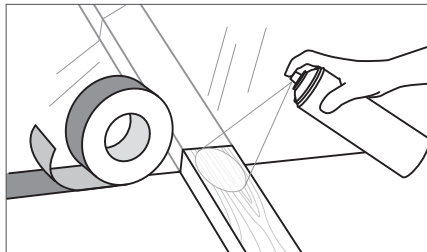

For highly porous and absorbent substrates, the primer should be brushed onto the substrate.

Benefits

- Sprayfunction, easy to apply
- Strengthens attachment
- Fast-drying
- Transparent
- DAFA Universal Primer is included in the Nordic Ecolabellings database of construction products that can be used in Swan-labelled buildings.

NB! Paint, varnish and plastic surfaces can be discolored. Protect sensitive surfaces or perform a test of the material before application.

Download safety data sheet here:
dafa-build.com



Content	DB no	DAFA no	EAN no
500 ml	1984522	620033110	5705636456522

Technical specifications	
Vent time	+20 °C approx. 10 minutes +5 °C approx. 20 minutes 0 °C approx. 30 minutes -5 °C approx. 40 minutes
Range	1 can of 500 ml covers approx. 50 running meters (40 mm width) depending on the porosity of the surface
Peel-value	AFERA 5001. 30 N/25 mm
Application temperature	Not below -5 °C
Storage time	Unopened 12 months. Keep dry and at +5 °C to +25 °C

