DAFA Multi Sealing™

DAFA Multi Sealing is a part of DAFA Radon System and is an elastic butyl sealing strip for special seals.

Application

- Constructions
- Special seals in renovation work
- Roof renovation
- Metal structures, containers, cold stores

Material

DAFA Multi Sealing is an extruded special butyl sealing strip, coated with stretch film.

Installation

Remove the cover sheet. Press DAFA Multi Sealing firmly against the item. Installation temperature:

+5° C to +25 °C.

Attention!

Surfaces must be completely clean, dry and free of grease and dust.

stored at room temperature until mounting.


Shelf-life

At least 2 years from the production date under normal storage conditions.



Eurofins-certification A+



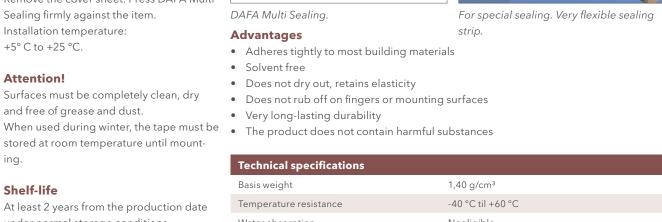

| Technical specifications | |
|--------------------------|--|
| Basis weight | 1,40 g/cm³ |
| Temperature resistance | -40 °C til +60 °C |
| Water absorption | Negligible |
| UV-bestandighed | Excellent |
| Basic raw material | Butyl rubber |
| Color | Black |
| Туре | Plastic |
| Adhesion | Good on PE foil, metal, glass, wood and concrete |
| Aging resistance | Good |

| Roll width | Lenght per roll | Contents per box. | DAFA item no. | EAN no. |
|------------|-----------------|-------------------|---------------|---------------|
| 50 mm | 5 m | 8 ruller | 620015438 | 5705636351131 |