

DAFA UV tape

DAFA UV tape is part of the DAFA AirVent System and is ideal for sealing roof underlays and wind barriers.



Warranty.

DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirVent System.

DAFA UV tape is a single-sided acrylic tape specially engineered for outdoor use in the building envelope under difficult installation and construction conditions. It is compatible with all DAFA vapor barriers. DAFA UV tape is resistant to direct sunlight, periodic rain, moisture, and extreme temperature fluctuations, ensuring lasting adhesion.

DAFA UV tape meets the stringent requirements for permanent air sealing of vapor barrier foils, in accordance with the Energy Saving Ordinance (EnEV) and DIN 4108-7 standards.

Uses

- Overlaps in roofing and wind barriers
- Repairs of roofing and wind barriers
- Joints between gypsum wallboards, cementitious, and multipurpose finishes
- Vapor barrier overlaps and repairs

Material

A single-sided tape with exceptionally high durability and adhesion properties. The adhesive is highly resistant to moisture and extreme climatic conditions.

Areas of application


- Overlaps in roof decking
- Repairs to roof decking
- Wind barrier overlaps

Environment


DAFA UV tape is listed in the database as a building product that can be used in Nordic Swan Ecolabelled buildings.



Download EPD for DAFA UV tape here: dafa-build.com/en/epd or scan the QR code

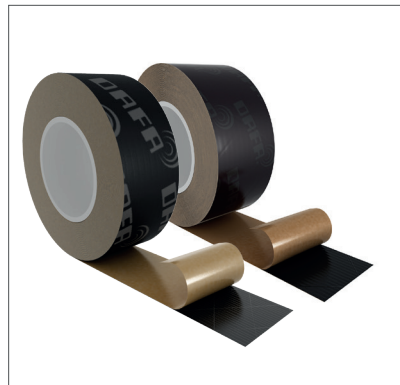

DAFA UV tape with and without logo.

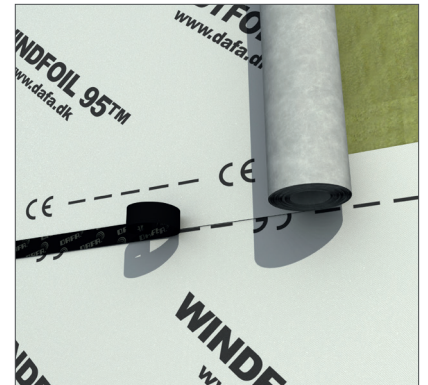

Dimension	Contents per box	DAFA no.	EAN no.
50 mm*	12 rolls of 25 m	620039511	5705636270869
Black 60 mm	10 rolls of 25 m	620016905	5705636360164
Black 60 mm no logo	10 rolls of 25 m	620026334	5705636425115
Black 100 mm	6 rolls of 25 m	620025138	5705636413778
Black 100 mm no logo**	6 rolls of 25 m	620026300	5705636420523
Black 60 mm w/split-liner 30/30***	10 rolls of 25 m	620047265	5705636270890

* Special order item. Min. order 720 rolls
 ** Special order item. Min. order 360 rolls
 *** Special order item. Min. order 600 rolls

We can produce customized sizes tailored to your exact requirements. Get in touch with our sales team at dbs@dafa-build.com to learn more about the possibilities.

Technical specifications

Thickness, foil + adhesive	(W/O liner) 0,30-0,33 mm (DIN EN 1942)
Grammage	230-250 g/m ² (DIN EN ISO 536)
Peel-value	30 N/25 mm (DIN EN 1939)
Installation	Surfaces must be dry and free of dust and oil. Recommended installation temperature from +5 °C
Temperature resistance	-30 °C to +100 °C
Additional properties	APEO / solvent free and water based
UV stability	1 year in Central European climate

LCA calculation

Product	Unit	GWP-total (A1-A3)
DAFA UV tape	kg CO ₂ eq./m ²	0,731



Eurofins-certification A+

