

DAFA double-sided adhesive vapour barrier tape



Warranty.


DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.

DAFA double-sided adhesive vapour barrier tape is a part of DAFA AirStop System and is a strong adhesive tape for bonding vapour barrier foils.

Application

Strong double-sided adhesive special tape that withstands a high permanent load.

- Seals joints
- Resistant to damp and solvents
- Suitable for attaching vapour barriers to steel structures
- Full attachment at overlap
- Approved for the bonding of vapour barrier foil in accordance with DS/EN 13984
- Listed in the database for building products that can be used in Nordic Swan Ecolabelled buildings

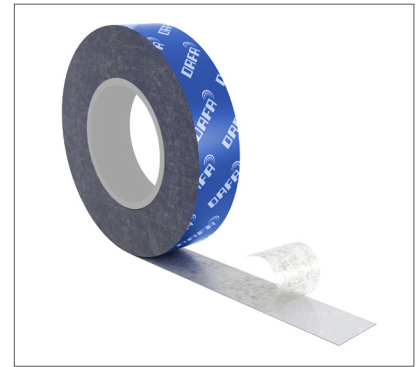

Download EPD for DAFA double-sided adhesive vapour barrier tape here: dafa-build.com/en/epd or scan the QR code

LCA calculation

Product	Unit	GWP-total (A1-A3)	GWP-total (The whole system)
DAFA double-sided adhesive vapour barrier tape	kg CO2 eq./m ²	0,466	0,903

Technical specifications

Adhesive	Acrylic adhesive, solvent free
Thickness	0,12 - 0,14 mm
Foil	Special paper, 12 g/m ²
Liner	Silicone paper, brown
Peel value	25N/25 mm (EN 1939)
Temperature resistance	-30 °C to +120 °C

Dimension	Contents per box	DAFA Item no	EAN no
30 mm x 25 m	12 rolls	620015189	5705636349312